



DECORATIVE

Pendant / Plafond



Bell
104



Circulus Pendant
106



Circulus Maxi Pendant
107



Concido
108



Sense 800 Pendant
109



Etna
110



Orion
111



Econ LED / Econ E27
112



Econ Plus E27
113

Interior decorative



StripLine
114



StripLine RGBW
116



StripLine TW
117



StripLine Accessories
118



NeoStrip
122



Chef
123



Ledstar Slim
124



Ledstar
125



Prelude
126



Prelude Square
127



View
128



Capella IsoSafe
129



Tube Mini S
130



Tube Mini R
131



Tube Micro S
132



Tube Micro R
133




Tube Micro Trio
134



Tube Micro Track
135



Tube Wall
136

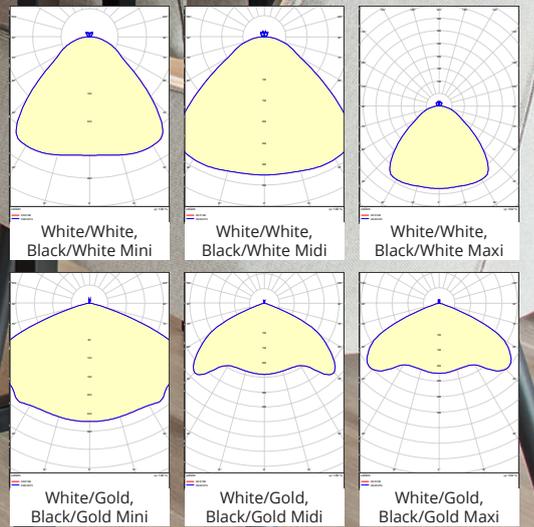


Bell



Ceiling lamp with deep-mounted light source that provides a comfortable light without glare. Supplied with a pendant ceiling box with space for the SG Smart Pill. Can also be fitted in adapters for Zip 230V rails and ShopLine 3-phase rails. Bell comes in three sizes and three different color combinations: Black/White, White/White and Black/Gold.

- FACTS**
- Ra>90
 - SDCM 3
 - UGR<22
 - 50.000h (L70/B50)
 - E27 socket
 - Light source included
 - Housing: Steel

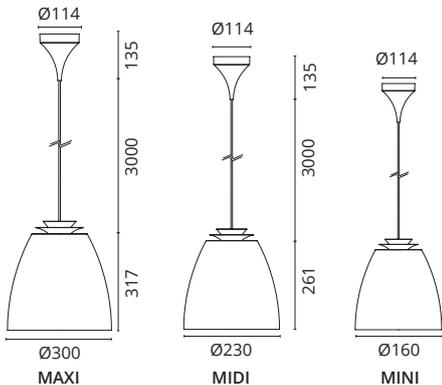

Version	Colour	Temp.	Watt	Lumen	Dimming	Article code
Mini	White/Gold	2700K	5W	240lm 48 lm/W	Trailing edge	312369
Mini	Black/White	2700K	5W	250lm 50 lm/W	Trailing edge	312361
Mini	Black/Gold	2700K	5W	240lm 48 lm/W	Trailing edge	312362
Midi	White/Gold	2700K	10W	560lm 56 lm/W	Trailing edge	312370
Midi	Black/White	2700K	10W	590lm 59 lm/W	Trailing edge	312364
Midi	Black/Gold	2700K	10W	560lm 56 lm/W	Trailing edge	312365
Maxi	White/Gold	2700K	15W	820lm 55 lm/W	Trailing edge	312371
Maxi	Black/White	2700K	15W	840lm 56 lm/W	Trailing edge	312367
Maxi	Black/Gold	2700K	15W	820lm 55 lm/W	Trailing edge	312368

Accessories			Article code
Zip 230V Pendant adapter	White (max 4,6 kg)	1-circuit	003046
Zip 230V Pendant adapter	Brushed steel (max 4,6 kg)	1-circuit	003047
Zip 230V Pendant adapter	Black (max 4,6 kg)	1-circuit	003107
ShopLine Pendant adapter	White (max 4,6 kg)	3-circuit	003108
ShopLine Pendant adapter	Black (max 4,6 kg)	3-circuit	003109
Pendant ceiling box	White - included in delivery		003164
Pendant ceiling box	Black - included		003163
Pendant Ceiling box, suitable for sloping ceilings	White		314332
Pendant Ceiling box, suitable for sloping ceilings	Black		314331
Recessed pendant ceiling box	White		314333
Recessed pendant ceiling box	Black		314334



DECORATIVE



Circulus Pendant





Pendant suspension on three adjustable wires, wholly uniform light with attractive design, made of powder-coated steel. Simple to mount using ceiling electrical box that can be screwed on to all known ceiling outlets/electrical boxes. Terminals with option of additional looping, current sent from driver to lamp via the adjustable wires so that there are no visible power cable.

FACTS

- Ra>80
- SDCM 3
- UGR<25
- 100.000h (L70/B50)
50.000h (L80/B10)
- Housing: Steel
- Optics: Acrylic diffuser (PMMA)
- Photobiological safety: RG 0

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	19W	1360lm 72 lm/W	Trailing edge	212005
White	3000K	19W	1345lm 71 lm/W	Trailing edge	212006
Black	2700K	19W	1360lm 72 lm/W	Trailing edge	214005
Black	3000K	19W	1345lm 71 lm/W	Trailing edge	214006





Circulus Maxi Pendant





Circulus Maxi Pendant is a round pendant luminaire with a minimalistic design, giving a beautiful, even light. The luminaire is produced in a powder-coated matt black or white steel, and can be dimmed using a DALI or phase control dimmer. We recommend LEDDim and LEDDim Smart. Ability to mount at different heights by means of the three adjustable wires. The pendant is easily fitted with a bracket that can be screwed directly into all known ceiling boxes. Visible cabling also possible.

FACTS

- Ra>80
- SDCM 3
- 100.000h (L70/B10)
- Housing: Steel
- Optics: Acrylic diffuser (PMMA)

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	3000K	30W	3060lm 102 lm/W	Trailing edge	214021
White	3000K	30W	3060lm 102 lm/W	DALI / Push	214025
White	4000K	30W	3410lm 114 lm/W	Trailing edge	214023
White	4000K	30W	3410lm 114 lm/W	DALI / Push	214027
Black	3000K	30W	2990lm 100 lm/W	Trailing edge	214022
Black	3000K	30W	2990lm 100 lm/W	DALI / Push	214026
Black	4000K	30W	3150lm 105 lm/W	Trailing edge	214024
Black	4000K	30W	3150lm 105 lm/W	DALI / Push	214028

DECORATIVE

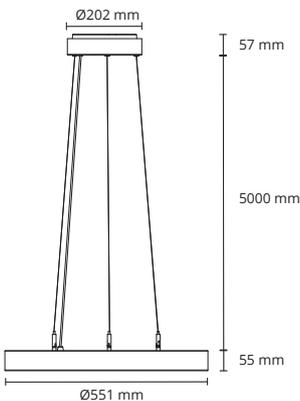



Concido Pendant




Concido Pendant is designed for a variety of applications where an elegant and effective direct/indirect lighting solution is required. Concido Pendant is suitable for raised ceiling areas such as lobby and entrance halls, shopping malls and other retail environments.


FACTS

- Ra>80
- SDCM 3
- UGR<19
- 50.000h (L70/B50)
- Light distribution: Direct/indirect
- Housing: Aluminium
- Optics: Opal glass matt blasted
- Pre-wired with 5.0m wire and cable.
Suspension bracket and cover for ceiling mounting is included.

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	3000K	57W	5260lm 93 lm/W	On/Off	8246 087009
White	3000K	57W	5260lm 93 lm/W	DALI / Push	8246 079774

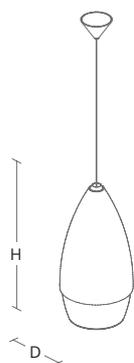

	D	H
Concido Pendant	292	645





Sense 800 Pendant





Sense 800 Pendant is a 'low profile' big rooms pendant. With a diameter of 800mm and a height of only 18mm, it looks like it's floating in the air. The minimalistic design with side lit panel gives a uniform light and a low glare at UGR<19. The luminaire is controlled by DALI. Sense 800 Pendant is suitable for raised ceiling areas such as lobbies and entrance halls, shopping malls and other retail environments. The suspension height is up to 5 m and the bayonet attachment system makes it easy to install - by one person only.

FACTS

- Ra>80
- SDCM 3
- UGR<19
- 50.000h (L80/B20)
- Light distribution: Direct/Indirect
- Housing: Aluminium and steel
- Optics: Acrylic diffuser (PMMA)
- Photobiological safety: RG 0

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	3000K	64W	7510lm 118 lm/W	DALI / Push	212192
White	4000K	64W	7980lm 125 lm/W	DALI / Push	212193
Black	3000K	64W	7510lm 118 lm/W	DALI / Push	212196
Black	4000K	64W	7980lm 125 lm/W	DALI / Push	212197

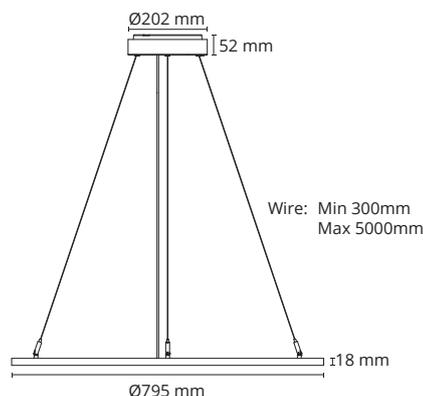



Etne

Etne is the perfect choice for storage rooms, hobby rooms and corridors, providing good light and wide light distribution. Easy installation directly in the ceiling or on the ceiling box, with loopable screwless terminal blocks and prepared for hidden or open cabling.

Etne with a PIR sensor turns the light on at movement and switches off after a chosen time, thereby saving energy. The sensor does not detect through walls or doors. The PIR sensor also features an adjustable daylight sensor that only turns on the light when it's dark. Etne with a PIR sensor can act as a master controlling up to ten other luminaires (slaves).





FACTS

- Ra>80
- SDCM 3
- UGR<22
- 50.000h (L80/B10)
- Housing: UV-stabilised polycarbonate
- Optics: UV-stabilised polycarbonate
- Photobiological safety: RG 0

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	3000K	11W	730lm 66 lm/W	On/Off	143090
White	3000K	11W	730lm 66 lm/W	PIR Sensor	143091
White	4000K	10W	820lm 82 lm/W	On/Off	143094
White	4000K	10W	820lm 82 lm/W	PIR Sensor	143095

Etne PIR

Sensor	
	Lux level
	Hold time, 5sec - 30min
TEST	Light always on

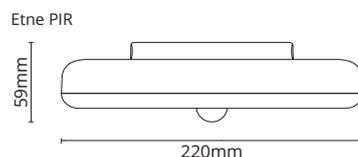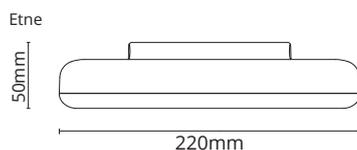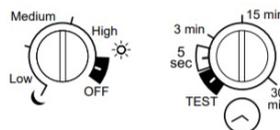





Orion

Attractive, round LED wall/ceiling luminaire for indoor mounting. Made of painted metal. Diffuser made of UV-stabilised opal polycarbonate. Efficient LED board with long service life. Hatch for easy access to connection, and option of both visible and concealed cabling as well as loopable quick clips. Vandal-resistant rating IK10.

FACTS

- Ra>80
- SDCM 3
- 50.000h (L70/B50)
- Housing: Steel
- Optics: Polycarbonate (PC)
- Photobiological safety: RG 0

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	10W	770lm 77 lm/W	Trailing edge	212100
White	3000K	10W	760lm 76 lm/W	Trailing edge	212110
White	3000K	10W	760lm 76 lm/W	Sensor	212111
White	3000K	20W	1460lm 73 lm/W	Trailing edge	212115
White	3000K	20W	1460lm 73 lm/W	Sensor Dim	212134
White	4000K	20W	1515lm 76 lm/W	Trailing edge	212125
White	4000K	20W	1515lm 76 lm/W	Sensor	212126
White	4000K	20W	1515lm 76 lm/W	Sensor Dim	212135
Black	2700K	10W	770lm 77 lm/W	Trailing edge	212105

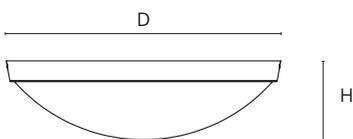

	D	H
Orion	300	87





Econ LED / Econ E27

Round lamp in several sizes. Vandal-resistant with impact-resistant polycarbonate opalescent diffuser. The whole luminaire has been approved for common access routes and has vandal-resistant rating IK10. KI II, two cable inputs and the option of additional looping using the integrated quick clips. Can be mounted to either the wall or ceiling with both concealed and visible cabling.

FACTS


- LED: Ra>80
- LED: SDCM 3
- LED: UGR<22
- LED: 50.000h (L70/B50)
- LED: Photobiological safety: RG 0
- LED, E27
- Housing: Aluminium
- Optics: Polycarbonate (PC)
- PC: Polycarbonate (PC) and Steel
- ALU: Aluminium, Polycarbonate (PC) and Steel
- Sensor : Max. 10 'Slave' luminaires

Econ LED IP44

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	3000K	10W	650lm 65 lm/W	Trailing edge	181193
White	3000K	10W	650lm 65 lm/W	Sensor	181194

Econ E27 IP20 / IP21

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	E27 PC		Class I	Max 11W E27 LED	111193
White	E27 ALU		Class II	Max 11W E27 LED	121191

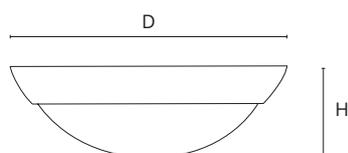

	D	H
Econ LED	300	92
Econ E27	280	85





Econ Plus


Vandal-resistant with impact-resistant polycarbonate opalescent diffuser. The whole luminaire has been approved for common access routes and has vandal-resistant rating IK10. Two cable inputs and the option of additional looping using the integrated quick clips. Can be mounted to either the wall or ceiling with both concealed and visible cabling.

DECORATIVE

FACTS

- E27
- Housing: Polycarbonate (PC)
- Optics: Polycarbonate (PC)

Colour			Article code
White	E27 PC	Max 11W E27 LED	171191

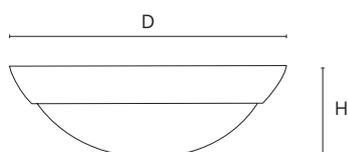

	D	H
Econ Plus	300	92





StripLine




StripLine is a flexible LED strip system for architectural lighting effects in ceilings, walls, niches and cabinets, for both indoor and outdoor use. It provides a premium light quality with high efficiency and great colour rendering. The LED strip is rated to IP54, has tape on the back for mounting and comes with connection cables already assembled. Lifetime 100.000h (9W/m). The LED stripe must be fitted in one of the available StripLine aluminium profiles for surface-mounted, corner, recessed or frameless installations.

It can also be used independently in indoor settings. The profiles are supplied with a solid polycarbonate front diffuser that can be easily attached and removed. The front diffuser is also supplied as a roll, providing the option of very long, continuous fronts (The diffuser on roll and the Round Diffuser are not compatible with the Slim and Soft profiles). Different driver kits are available, dimmable with phase-cut or push dim. Driver kits come complete with screwless terminal block for looping. The drivers are rated to IP20.

To control the light, use a remote control and/or pulse switch. The LEDs are positioned at very brief intervals and deliver an even light. StripLine can be cut per 3.8 cm (9W/m), 3.3 cm (15W/m) and 7.1 cm (RGBW) to customise each individual installation. When cutting, silicone should be applied to maintain water protection.

FACTS

- Ra>90
- SDCM: 2
- LEDstrips: 24VDC
- 9W/m: 100.000h (L80/B50)
15W/m: 50.000h (L90/B50)
- Material: Polyuretán (PUR)
- Pre-wired with cable:
1,8m: 2m+0,15m
3,6m, 5,0m, 10m: 2x5m



length	Temp.	Watt / m	Lumen / m	Dimming	Article code
1,8m	2700K	9W / m	827lm / m	Ordered separately	391401
3,6m	2700K	9W / m	827lm / m	Ordered separately	391403
5,0m	2700K	9W / m	827lm / m	Ordered separately	391405
10,0m	2700K	9W / m	827lm / m	Ordered separately	391407
1,8m	2700K	15W / m	1368lm / m	Ordered separately	391411
3,6m	2700K	15W / m	1368lm / m	Ordered separately	391413
5,0m	2700K	15W / m	1368lm / m	Ordered separately	391415
10,0m	2700K	15W / m	1368lm / m	Ordered separately	391417
1,8m	3000K	9W / m	914lm / m	Ordered separately	391402
3,6m	3000K	9W / m	914lm / m	Ordered separately	391404
5,0m	3000K	9W / m	914lm / m	Ordered separately	391406
10,0m	3000K	9W / m	914lm / m	Ordered separately	391408
1,8m	3000K	15W / m	1512lm / m	Ordered separately	391412
3,6m	3000K	15W / m	1512lm / m	Ordered separately	391414
5,0m	3000K	15W / m	1512lm / m	Ordered separately	391416
10,0m	3000K	15W / m	1512lm / m	Ordered separately	391418
5,0m	4000K	9W / m	914lm / m	Ordered separately	391409
10,0m	4000K	15W / m	1656lm / m	Ordered separately	391419



DECORATIVE



StripLine RGBW

StripLine is a flexible LED strip system designed to provide architectural lighting on ceilings and walls, in niches and cabinets, and is suitable for both indoor and outdoor use. StripLine RGBW allows you to create all the colours of the rainbow by mixing red, green and blue (RGB) in different ways. It also features pure white (W).

StripLine RGBW requires a driver and controller in order to operate correctly. To control the controller (the light), you can use a handy remote control and/or pulse switch.

The LED strip is encapsulated to an IP54 rating, and is supplied with mounting tape on the rear and connection cables already fully fitted. The LED strip must be fitted in one of the available StripLine aluminium profiles for surface-mounted, corner, recessed or frameless installations. It can also be used independently in indoor settings. The profiles are supplied with a solid polycarbonate front diffuser that can be easily attached and removed. The front diffuser is also supplied as a roll, providing the option of very long, continuous fronts (The diffuser on roll and the Round Diffuser are not compatible with the Slim and Soft profiles). Different driver kits are available, dimmable with phase-cut or push dim. Driver kits come complete with screwless terminal block for looping. The drivers are encapsulated to an IP20 rating.

StripLine RGBW can be cut at intervals of 7.1 cm to be tailored to each individual installation. When cutting, silicone should be applied to maintain water protection.

FACTS

- Ra>90
- SDCM: 2
- LEDstrips: 24VDC
- 50.000h (L90/B50)
- Material: Polyuretanan (PUR)
- Pre-wired with 2x2m cable

length	Temp.	Watt / m	Lumen / m	Dimming	Article code
5,0m	3000K RGBW	15W / m	790lm / m	RGBW	391452

Accessories				Article code
Controller RF RGBW	150W / Push Dim	L175 x W45 x H27		391455
Remote Control RF RGBW		L139 x W36 x H11		391457
LEDDim Smart Color Controller RF 150W / Push Dim		L175 x W45 x H27		820483




StripLine RGBW



LEDDim Smart Controller



Remote Control





StripLine TW

StripLine is a flexible LED strip system for architectural lighting effects in ceilings, walls, niches and cabinets, for both indoor and outdoor use. StripLine TW comes in two colour temperature ranges: 2700–6500K for traditional TW with the normal circadian spectrum, of 2000–4000K for normal use in homes, including warm and cosy colour temperatures. TW allows you to regulate both the lighting level and colour temperature independently. It provides a premium light quality with high efficiency and great colour rendering.

The LED strip is rated to IP54, has tape on the back for mounting and comes with connection cables already assembled. The LED strip must be fitted in one of the available StripLine aluminium profiles for surface-mounted, corner, recessed or frameless installations. It can also be used independently in indoor settings. The profiles are supplied with a solid polycarbonate front diffuser that can be easily attached and removed. The front diffuser is also supplied as a roll, providing the option of very long, continuous fronts (The diffuser on roll and the Round Diffuser are not compatible with the Slim and Soft profiles). The LEDs are positioned at very brief intervals and deliver an even light.

StripLine TW can be cut per 5.5 cm to customise each individual installation. When cutting, silicone should be applied to maintain water protection. StripLine TW requires a driver and controller in order to operate correctly. To control the controller (the light), you can use a handy remote control and/or pulse switch.

DECORATIVE


FACTS

- Ra>90
- SDCM: 3
- LEDstrips: 24VDC
- Tunable White Lumen @4000K/6500K
- 50.000h (L80/B10)
- Material: Polyuretán (PUR)
- Pre-wired with 1x5m cable

length	Temp.	Watt / m	Lumen / m	Dimming	Article code
3,6m	2000-4000K	9W / m	950lm / m	TW	391420
5m	2700-6500K	15W / m	1650lm / m	TW	391422
Accessories					Article code
LEDDim Smart Color Controller RF 150W / Push Dim				L175 x W45 x H27	820483



LEDDim Smart Controller



StripLine Profile


The profiles are suitable for use indoors and outdoors. Standard 180cm length. Supplied with end covers and front diffusers.

Recessed profile

- Material: Aluminium



Colour		Article code
White	Recessed profile 1,8m In/Out	391430
Black	Recessed profile 1,8m In/Out	391431




Plaster in profile

- Material: Aluminium



Colour		Article code
White	Plaster in profile 1,8m In/Out	391432

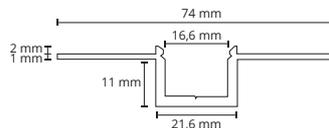


Surface profile

- Material: Aluminium



Colour		Article code
White	Surface profile 1,8m In/Out	391434
Black	Surface profile 1,8m In/Out	391435



Corner profile

- Material: Aluminium



Colour		Article code
White	Corner profile 1,8m In/Out	391436
Black	Corner profile 1,8m In/Out	391437




Surface profile corner

- Material: Aluminium



Colour		Article code
White	Surface profile corner In/Out	391460
Black	Surface profile corner In/Out	391461

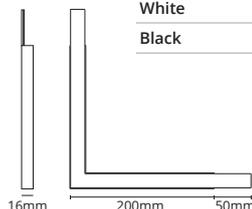

StripLine Profile


The profiles are suitable for use indoors and outdoors. Standard 180cm length. Supplied with end covers and front diffusers.

Surface profile Slim

- Material: Aluminium



Colour		Article code
White	Recessed profile Slim 1,8m In/Out	391475
Black	Recessed profile Slim 1,8m In/Out	391476




Surface profile Soft

- Material: Aluminium



Colour		Article code
White	Surface profile Soft 1,8m In/Out	391477
Black	Surface profile Soft 1,8m In/Out	391478





StripLine Accessories

End cover square

• Polycarbonate (PC)



End cover version	Couleur	Article code
Recessed	White	391445
Recessed	Black	391446
Plaster in	White	391447
Surface	White	391448
Surface	Black	391449
Corner	White	391450
Corner	Black	391451

End cover round

• Polycarbonate (PC)



End cover version	Couleur	Article code
Recessed	White	391462
Recessed	Black	391463
Plaster in	White	391464
Surface	White	391465
Surface	Black	391466


Driver

• 50.000h



Driver	Dimmer		Article code
24V driver 36W	Trailing edge	L200 x W85 x H35	820440
24V driver 75W	Trailing edge	L200 x W85 x H35	820441
24V driver 120W	DALI / Push Dim	L240 x W60 x H49	820443
24V driver 150W	Trailing edge	L310 x W85 x H35	820442

Accessories

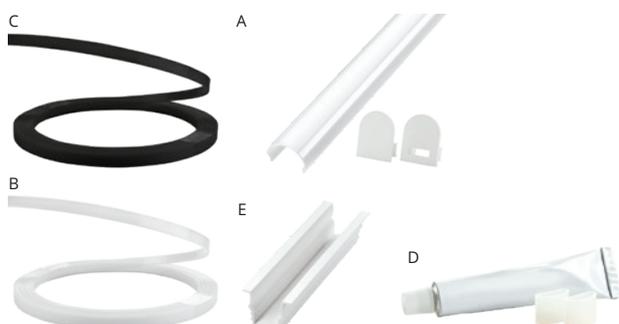

Accessories		Article code
A. Diffuser round Opal 1,8m	<i>Not for Slim and Soft profiles</i>	391453
B. Diffuser Opal 10m	<i>Not for Slim and Soft profiles</i>	391428
C. Diffuser Black 10m	<i>Not for Slim and Soft profiles</i>	391427
D. Cutting kit with 2x end capsules IP54		391438
E. Assembly tool	<i>Not for Slim and Soft profiles</i>	391458



NeoStrip

NeoStrip is an RGB LED strip, which enables creative lighting solutions both indoors and outdoors. All the colours of the rainbow can be created by mixing red, green and blue (RGB) in different ways. NeoStrip is encased in silicone and has waterproof IP65 protection. No profile or diffuser is required.

NeoStrip has a top-bending radius of 300mm, and comes with clips for fixing to the surface, making it very easy and flexible to install. It can be cut at intervals of 6.3 cm to be tailored to each individual installation. When cutting, an end cap can be mounted to achieve waterproof IP54 protection. NeoStrip requires a driver and a controller. To control the light, use a remote control and/or pulse switch.


FACTS

- SDCM: 1
- LEDstrips: 24VDC
- 50.000h (L70/B50)
- Material: Polyuretan (PUR)
- Pre-wired with 2 cable

length	Temp.	Watt	Lumen	Driver	Article code
2,4m	RGB	15W / m	390lm / m	Ordered separately	391470
5,0m	RGB	15W / m	390lm / m	Ordered separately	391471

Driver	Dimming	Article code
24V Driver 36W	Trailing edge	L200 x W85 x H35 820440
24V Driver 75W	Trailing edge	L200 x W85 x H35 820441
24V Driver 150W	Trailing edge	L310 x W85 x H35 820442

Accessories		Article code
Controller RF RGB	216W / Push Dim	L175 x W45 x H27 391454
Remote Control RF RGB		L139 x W36 x H11 391456
Cutting kit with 2x end capsules IP54		391472
LEDDim Smart Color Controller RF 150W / Push Dim	L175 x W45 x H27	820483





Chef




Under cabinet luminaire with 1-4 spots. Four lengths of replaceable LED modules, integrated switch, high RA value, dimmable driver integrated and simple to mount using loopable terminals and extra terminal for additional wiring. Its total height of only 30 mm makes it usable in many places.


FACTS

- Ra>90
- SDCM 2
- 50.000h (L70/B10)
- Housing: Steel
- Optics: Acrylique (PMMA)

Colour	Temp.	Watt	Lumen	Driver	Article code
White	3000K	1x5W	360lm 72 lm/W	Trailing edge	391055
White	3000K	2x5W	720lm 72 lm/W	Trailing edge	391056
White	3000K	3x5W	1080lm 72 lm/W	Trailing edge	391057
White	3000K	4x5W	1440lm 72 lm/W	Trailing edge	391058

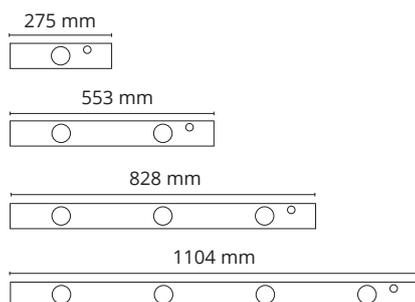

75
30





LEDstar Slim


Compact downlight with build height of just 11mm. Provides great light under or inside cabinets and other applications with limited space. LEDstar Slim uses energy efficient LEDs and delivers 240lm with 105 degree diffusion. 3 meter cable included.

FACTS

- Ra>90
- SDCM 3
- 105° beam angle
- System wattage: 5W
- 50.000h (L80/B20)
- Housing: Aluminium
- Optics: Plastic, opal prism
- 3 meter cable included
- 24V DC Driver: Parallel connection

Colour	Temp.	Watt	Lumen	Driver	Article code
White	2700K	4,5W	240lm 48 lm/W	Ordered separately	912140
White	3000K	4,5W	240lm 48 lm/W	Ordered separately	912141
Black	2700K	4,5W	230lm 46 lm/W	Ordered separately	912142
Black	3000K	4,5W	230lm 46 lm/W	Ordered separately	912143

Driver	Dimming	Article code
24V Driver 20W	Trailing edge	L250 x W70 x H28 820186
24V Driver 36W	Trailing edge	L200 x W85 x H35 820440
24V Driver 75W	Trailing edge	L200 x W85 x H35 820441
24V Driver 120W	DALI / Push Dim	L240 x W60 x H49 820443
24V Driver 150W	Trailing edge	L310 x W85 x H35 820442

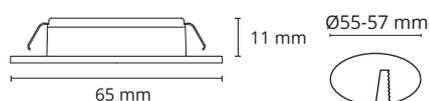



LEDstar

LED spot for under cabinet and canopy lighting. Can be both flush-mounted and surface-mounted using the removable ring. Spot incl. 3 meter cable for simple connection to driver (accessory). Made of die-cast aluminium

DECORATIVE



FACTS

- Ra>90
- SDCM 3
- 40° beam angle
- 50.000h (L80/B20)
- Housing: Aluminium
- Optics: Plastic, opal
- 3 meter cable included
- 24V DC-Driver: Parallel connection

Version	Colour	Temp.	Watt	Lumen	Driver	Article code
DC 24V	White	2700K	2,4W	140lm 58 lm/W	Ordered separately	912064
DC 24V	Br. steel	2700K	2,4W	140lm 58 lm/W	Ordered separately	997064
DC 24V	Chroom	2700K	2,4W	140lm 58 lm/W	Ordered separately	998064
DC 24V	Black	2700K	2,4W	140lm 58 lm/W	Ordered separately	970064

Driver	Dimming	Article code
24V Driver 20W	Trailing edge	L250 x W70 x H28 820186
24V Driver 36W	Trailing edge	L200 x W85 x H35 820440
24V Driver 75W	Trailing edge	L200 x W85 x H35 820441
24V Driver 120W	DALI / Push Dim	L240 x W60 x H49 820443
24V Driver 150W	Trailing edge	L310 x W85 x H35 820442

Can be used for recessed mounting without top housing

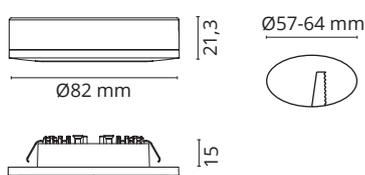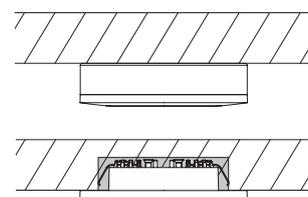



Prelude


Mirror luminaire made of aluminium with diffuser made of Acrylic (PMMA). Can be installed with either with concealed or visible cable.

Design: Hallvard Jakobsen



FACTS

- Ra>80
- UGR<24
- SDCM 3
- 50.000h (L70/B10)
- IP44 (mounted horizontally) / IP20 (mounted vertically)
- Housing: Aluminium
- Optics: Acrylic (PMMA)
- Photobiological safety: RG 0

Version	Colour	C. Temp.	Watt	Lumen	Control	Article code
	White	2700K	16W	1000lm 63 lm/W	Trailing edge	111340
	White	3000K	16W	1070lm 67 lm/W	Trailing edge	111345
Outlet	White	2700K	16W	1000lm 63 lm/W	Trailing edge	111341
Outlet	White	3000K	16W	1070lm 67 lm/W	Trailing edge	111346
2xOutlet	White	2700K	16W	1000lm 63 lm/W	Trailing edge	111343
	Brushed steel	2700K	16W	1000lm 63 lm/W	Trailing edge	197340
	Brushed steel	3000K	16W	1070lm 67 lm/W	Trailing edge	197345



	L	H	W
16W LED	510	70	80
16W LED with outlet	560	70	80
16W LED with 2x outlet	630	70	80

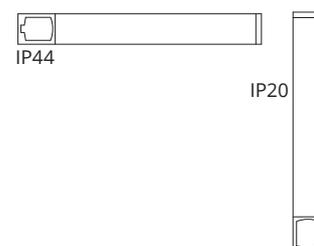

IP44: Horizontally
IP20: Vertically





Prelude Square

Prelude Square is a mirror luminaire with a sharp design. The luminaire provides a very homogeneous light generated by a specific LED lens technology, which makes it the obvious choice next to a mirror. Therefore, it's the ideal choice for bathrooms and similar environments. The luminaire can be dimmed by trailing edge dimming. The light output can be adjusted by dipswitch on the driver. Tunable White 2000-4000K LEDDim.

DECORATIVE

FACTS

- Ra>90
- SDCM 3
- 50.000h (L90/B10)
- IP44 (mounted horizontally) / IP40 (mounted vertically)
- Housing: Aluminium
- Optics: Acrylic (PMMA)
- Front cover in aluminium for indirect lighting

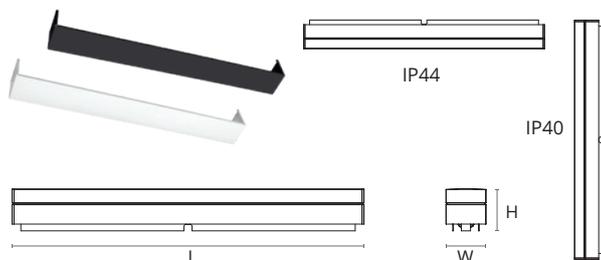

	L	W	H
LED	519	59	62
LED PIR	615	59	62
LED with outlet	590	59	62
LED PIR with outlet	686	59	62



Class I, with outlet

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	16W	1490lm 93 lm/W	Trailing edge	111372
White	2700K	16W	1490lm 93 lm/W	PIR Sensor	111378
White	3000K	16W	1490lm 93 lm/W	Trailing edge	111373
White	3000K	16W	1490lm 93 lm/W	PIR Sensor	111379
White	4000K	16W	1540lm 96 lm/W	PIR Sensor	111387
White	2000-4000K	12W TW	1400lm 117 lm/W	TW LEDDim	111394
Black	2700K	16W	1490lm 93 lm/W	Trailing edge	111384
Black	2000-4000K	12W TW	1370lm 114 lm/W	TW LEDDim	111396

Class I

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	3000K	16W	1490lm 93 lm/W	DALI	111381

Class II


Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	16W	1490lm 93 lm/W	Trailing edge	111370
White	2700K	16W	1490lm 93 lm/W	PIR Sensor	111374
White	3000K	16W	1490lm 93 lm/W	Trailing edge	111371
White	3000K	16W	1490lm 93 lm/W	PIR Sensor	111375
White	4000K	16W	1540lm 96 lm/W	Trailing edge	111380
White	4000K	16W	1540lm 96 lm/W	PIR Sensor	111386
White	2000-4000K	12W TW	1400lm 117 lm/W	Trailing edge	111393
Black	3000K	16W	1490lm 93 lm/W	PIR Sensor	111390
Black	2000-4000K	12W TW	1370lm 114 lm/W	TW LEDDim	111395

Accessories

	Article code
White Front cover, Steel	111385
Black Front cover, Steel	111389
Diffusor	003950



View


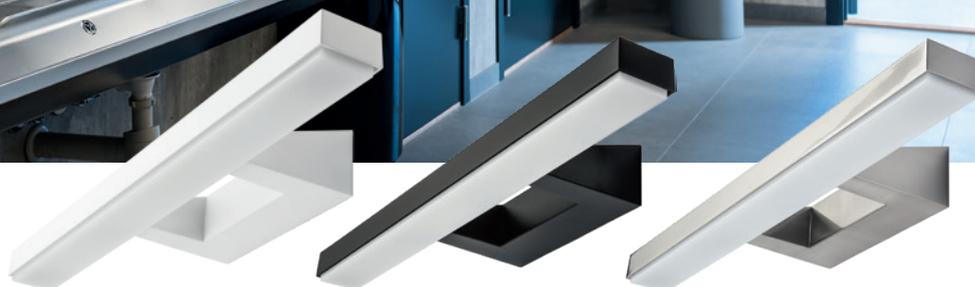


Slim bathroom luminaire for easy mounting over mirror. The luminaire is equipped with a long-life integrated LED light source. White, black or brushed steel in color. Bracket for mounting on top of cabinets available as accessory.



FACTS

- Ra>90
- SDCM 3
- 50.000h (L70/B10)
- Housing: Aluminium
- Optics: Opal Polycarbonate
- Photobiological safety: RG 0

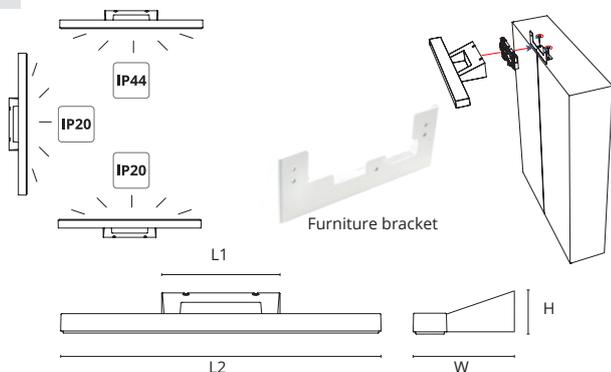

	L1	L2	H	W
View 460mm	170	460	60	135
View 460mm with outlet	170	460	60	150
View 900mm	170	896	60	135

460mm

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	16W	870lm 54 lm/W	Trailing edge	111420
White	3000K	16W	930lm 58 lm/W	Trailing edge	111421
White	4000K	16W	1010lm 63 lm/W	Trailing edge	111422
Black	2700K	16W	680lm 43 lm/W	Trailing edge	114420
Black	3000K	16W	730lm 46 lm/W	Trailing edge	114421
Black	4000K	16W	790lm 49 lm/W	Trailing edge	114432
Br. steel	2700K	16W	770lm 48 lm/W	Trailing edge	197420
Br. steel	3000K	16W	820lm 51 lm/W	Trailing edge	197421

460mm with outlet

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	16W	870lm 54 lm/W	Trailing edge	111433
White	3000K	16W	930lm 58 lm/W	Trailing edge	111434
Black	2700K	16W	680lm 43 lm/W	Trailing edge	111435
Black	3000K	16W	730lm 46 lm/W	Trailing edge	111436


900mm

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	30W	1740lm 58 lm/W	Trailing edge	111430
White	3000K	30W	1860lm 62 lm/W	Trailing edge	111431
White	4000K	30W	2010lm 67 lm/W	Trailing edge	111432
Black	2700K	30W	1360lm 45 lm/W	Trailing edge	114430
Black	3000K	30W	1460lm 49 lm/W	Trailing edge	114431
Black	4000K	30W	1580lm 53 lm/W	Trailing edge	114433

Accessories

	Article code
White Furniture bracket	100420
Black Furniture bracket	100421



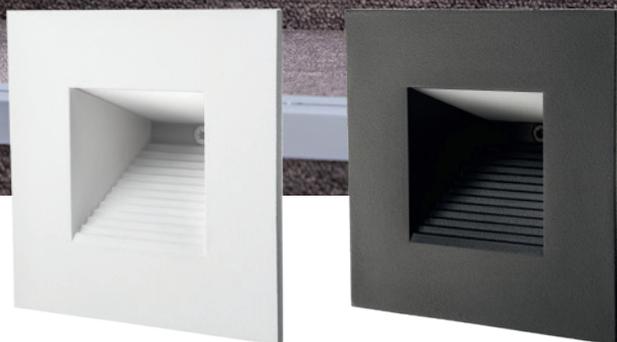


Capella IsoSafe

Capella IsoSafe is a wall spotlight for mounting at low heights. Well-suited for lighting stairways or as night lighting. Made of die-cast aluminium and powder-coated in black or white. Our IsoSafe products can be mounted directly into the insulation. Comes with SG Lighting's new switch box with fixing for plastic piping.

FACTS

- Ra>80
- SDCM 3
- 25° beam angle
- 50.000h (L70/B50)
- Housing: Aluminium
- Optics: Clear glass
- Our IsoSafe products can be mounted directly in insulation

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	2W	60lm 30 lm/W	Trailing edge	912030
White	3000K	2W	60lm 30 lm/W	Trailing edge	912031
White	4000K	2W	60lm 30 lm/W	Trailing edge	912032
Black	2700K	2W	25lm 13 lm/W	Trailing edge	912033
Black	3000K	2W	25lm 13 lm/W	Trailing edge	912034
Black	4000K	2W	25lm 13 lm/W	Trailing edge	912039

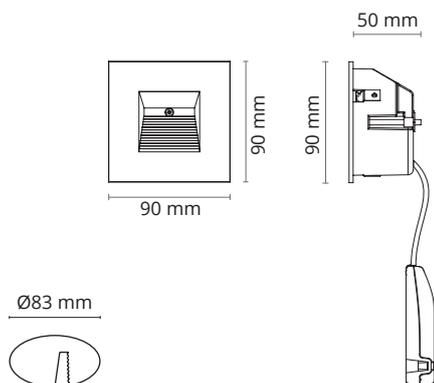



Tube Mini S



Tube Mini S is a stylish and minimalist spotlight for mounting on ceilings, inclined ceilings or walls. It has a powerful light that can be used indirect for general lighting or directly to emphasize parts of the environment. The spot can be rotated and tilted to exactly where the light is needed. It is easy to install on all known ceiling outlets and boxes and can be looped. The spot comes with a black bezel as standard, with low glare. Other bezels in white and gold are available as accessory.

FACTS

- Ra 98
- SDCM 2
- 40° beam angle
- 100.000h (L90/B10)
- Housing: Aluminium
- Optics: Polycarbonate (PC)

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	14W	880lm 63 lm/W	Trailing edge	320690
White	3000K	14W	900lm 64 lm/W	Trailing edge	320692
Black	2700K	14W	880lm 63 lm/W	Trailing edge	320691
Black	3000K	14W	900lm 64 lm/W	Trailing edge	320693

Accessories		Article code
Bezel	White	320683
Bezel	Black - Included with the luminaire	320684
Bezel	Gold	320685
Decoration ring opal	20mm	320757
Decoration ring opal	55mm	320758

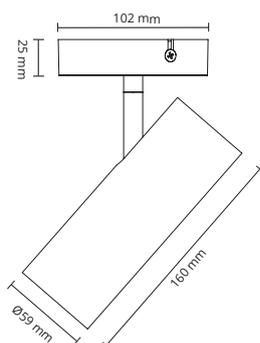



Tube Mini R





Tube Mini R is a stylish and minimalist spotlight for recessed mounting in straight and inclined ceilings. It has a powerful light that can be used indirect for general lighting or directly to emphasize parts of the environment. The spot can be rotated and tilted to exactly where the light is needed. It is easy to install with springs in a standard Ø83 hole. Can be looped and is class II, for easy replacement where earth cable is not present. Tube Mini R comes with a black bezel as standard, with low glare. Other bezels are also available separately as accessory.

FACTS

- Ra 98
- SDCM 2
- Tunable White Lumen @4000K
- 40° beam angle
- 100.000h (L90/B10)
- Housing: Aluminium
- Optics: Polycarbonate (PC)

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	14W	880lm 63 lm/W	Trailing edge	320696
White	3000K	14W	900lm 64 lm/W	Trailing edge	320697
White	2000-4000K	13W	620lm 48 lm/W	TW LEDDim	320726
Black	2700K	14W	880lm 63 lm/W	Trailing edge	320698
Black	3000K	14W	900lm 64 lm/W	Trailing edge	320699
Black	2000-4000K	13W	620lm 48 lm/W	TW LEDDim	320727

Accessories		Article code
Bezel	White	320683
Bezel	Black - Included with the luminaire	320684
Bezel	Gold	320685
Decoration ring opal	20mm	320757
Decoration ring opal	55mm	320758
Rehabring White	133mm	009223
Rehabring White	180mm	009224
Rehabring White	250mm	009227
Rehabring Black	133mm	009143
Rehabring Black	180mm	009236
Rehabring Black	250mm	009427

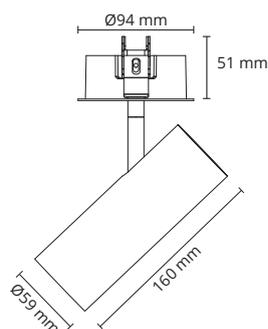



Tube Micro S



Tube Micro S is a stylish and minimalist spotlight for mounting on ceilings, inclined ceilings or walls. It has a powerful light that can be used indirect for general lighting or directly to emphasize parts of the environment. The spot can be rotated and tilted to exactly where the light is needed. It is easy to install on all known ceiling outlets and boxes and can be looped. The spot comes with a black bezel as standard, with low glare. Other bezels in white and gold are available as accessory.

FACTS

- Ra 98, Ra>95 (DimToWarm)
- SDCM 2
- 36° beam angle
- 50.000h (L90/B10)
- Housing: Aluminium
- Optics: Polycarbonate (PC)

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	7W	360lm 51 lm/W	Trailing edge	320806
White	3000K	7W	370lm 53 lm/W	Trailing edge	320807
White	2000-2800K	7W	340lm 49 lm/W	Trailing edge	320808
Black	2700K	7W	360lm 51 lm/W	Trailing edge	320809
Black	3000K	7W	370lm 53 lm/W	Trailing edge	320810
Black	2000-2800K	7W	340lm 49 lm/W	Trailing edge	320811

Accessories	Article code
Bezel Ø39 White	320680
Bezel Ø39 Black - Included with the luminaire	320681
Bezel Ø39 Gold	320682
Decoration ring opal 10mm	320756

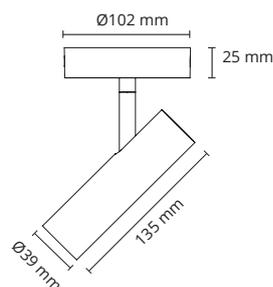





Tube Micro R

Tube Micro R is a stylish, minimalist built-in spot for installation in level or sloping ceilings. Its intense light can be used indirectly for general lighting or directly to highlight parts of the surroundings. The spot can be turned and tilted to direct the light to exactly where light is needed. Tube Micro R can be installed easily in holes in the ceiling using springs. The luminaire is ideal for refurbishments, as it fits in holes from Ø68–83 mm. The luminaire also fits SG's Rehabrings (accessory) up to Ø250. The driver and junction box are IsoSafe and can be installed directly into insulation. Can be looped and is Class II, which facilitates easy replacement where there is no earth lead. Tube Micro R comes as standard with a low-glare black bezel. Other bezels are available separately as accessories.

FACTS

- Ra 98, Ra>95 (DimToWarm)
- SDCM 2
- 36° beam angle
- 100.000h (L90/B10)
- Housing: Aluminium
- Optics: Polycarbonate (PC)

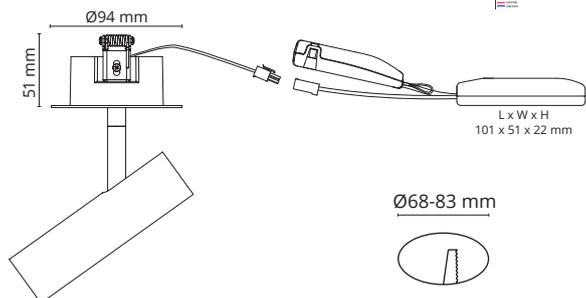

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	15W	680lm 45 lm/W	Trailing edge	320707
White	2700K	15W	680lm 45 lm/W	DALI	320750
White	3000K	15W	700lm 47 lm/W	Trailing edge	320708
White	3000K	15W	700lm 47 lm/W	DALI	320751
White	2000-2800K	12W	590lm 49 lm/W	Trailing edge	320709
White	2000-2800K	12W	590lm 49 lm/W	DALI	320752
Black	2700K	15W	680lm 45 lm/W	Trailing edge	320710
Black	2700K	15W	680lm 45 lm/W	DALI	320753
Black	3000K	15W	700lm 47 lm/W	Trailing edge	320711
Black	3000K	15W	700lm 47 lm/W	DALI	320754
Black	2000-2800K	12W	590lm 49 lm/W	Trailing edge	320712
Black	2000-2800K	12W	590lm 49 lm/W	DALI	320755

Accessories	Article code	
Bezel Ø39	White	320680
Bezel Ø39	Black - Included with the luminaire	320681
Bezel Ø39	Gold	320682
Decoration ring opal	10mm	320756
Rehabring White	133mm	009223
Rehabring White	180mm	009224
Rehabring White	250mm	009227
Rehabring Black	133mm	009143
Rehabring Black	180mm	009236
Rehabring Black	250mm	009427





Tube Micro Trio



Tube Micro Trio is a rondell with slim, precise spots for a minimalistic, exclusive look. It is easy to install on all known ceiling outlets and boxes in different kinds of residential rooms as bedroom, rooms, halls etc. Each spot can be directed to where the light is needed. Tube Micro Trio is available in 2700K and 3000K or in DimToWarm (2000-2800K). It has an excellent colour rendering and very long lifetime. The spots come with black bezels as standard, with low glare. Other bezels in white and gold are available as accessory.

FACTS

- Ra 98, Ra>95 (DimToWarm)
- SDCM 2
- 40° beam angle
- 100.000h (L90/B10)
50.000h (L80/B20) DimToWarm
- Housing: Aluminium
- Optics: Polycarbonate (PC)

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	18W	1020lm 57 lm/W	Trailing edge	320686
White	3000K	18W	1050lm 58 lm/W	Trailing edge	320687
White	2000-2800K	18W	960lm 53 lm/W	Trailing edge	320694
Black	2700K	18W	1020lm 57 lm/W	Trailing edge	320688
Black	3000K	18W	1050lm 58 lm/W	Trailing edge	320689
Black	2000-2800K	18W	960lm 53 lm/W	Trailing edge	320695

Accessories	Article code
Bezel Ø39 White	320680
Bezel Ø39 Black - Included with the luminaire	320681
Bezel Ø39 Gold	320682
Decoration ring opal 10mm	320756

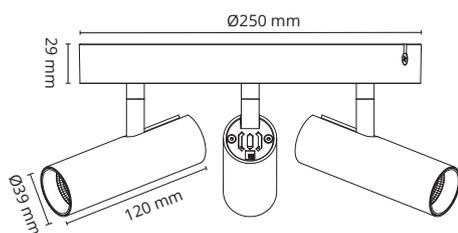



Tube Micro Track





Tube Micro Track is a rail with slim, precise spots for a minimalistic, exclusive look. It is easy to install on all known ceiling outlets and boxes in different kinds of residential rooms as bedroom, rooms, halls etc. Each spot can be directed to where the light is needed. Tube Micro Track is available in 2700K and 3000K or in DimToWarm (2000-2800K). It has an excellent colour rendering and very long lifetime. The spots come with black bezels as standard, with low glare. Other bezels in white and gold are available as accessory.

FACTS

- Ra 98, Ra>95 (DimToWarm)
- SDCM 2
- 40° beam angle
- 100.000h (L90/B10)
50.000h (L80/B20) DimToWarm
- Housing: Aluminium
- Optics: Polycarbonate (PC)

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	18W	1020lm 57 lm/W	Trailing edge	320701
White	2000-2800K	18W	960lm 53 lm/W	Trailing edge	320703
Black	2700K	18W	1020lm 57 lm/W	Trailing edge	320702
Black	2000-2800K	18W	960lm 53 lm/W	Trailing edge	320704

Accessories	Article code
Bezel Ø39 White	320680
Bezel Ø39 Black - <i>Included with the luminaire</i>	320681
Bezel Ø39 Gold	320682
Decoration ring opal 10mm	320756

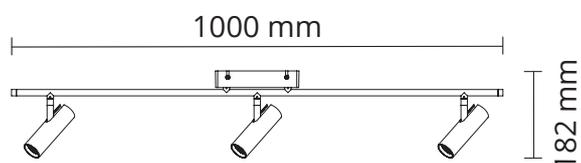

DECORATIVE



Tube Wall



Tube Wall is a stylish wall mounted lamp with integrated dimmer and USB A+C charger. It is suitable as bed lamp for residential use as well as at hotels and hospitals. The light head is freely adjustable with a gooseneck arm. Tube Wall comes with a black bezel as standard, with low glare. Other bezels in white or gold are available as accessory. Equipment with a powerful USB charger that provides up to 3A (18W). When both ports are in use, the charger automatically distributes the power so that the device with the lowest battery level gets the most power.

FACTS

- Ra 98
- SDCM 2
- 38° beam angle
- 50.000h (L90/B10)
- Housing: Aluminium
- Optics: Polycarbonate (PC)

Colour	Temp.	Watt	Lumen	Dimming	Article code
White	2700K	8W	350lm 44 lm/W	Integrated dimmer	320800
White	3000K	8W	360lm 45 lm/W	Integrated dimmer	320801
Black	2700K	8W	350lm 44 lm/W	Integrated dimmer	320802
Black	3000K	8W	360lm 45 lm/W	Integrated dimmer	320803

Accessories		Article code
Smartphone shelf	White	320812
Smartphone shelf	Black	320813
Bezel Ø39	White	320680
Bezel Ø39	Black - Included with the luminaire	320681
Bezel Ø39	Gold	320682
Decoration ring opal	10mm	320756

